




ENEFLUX ARMTEK MAGNETICS, INC.
magnets for industry



Standard Bonded Neodymium Magnets

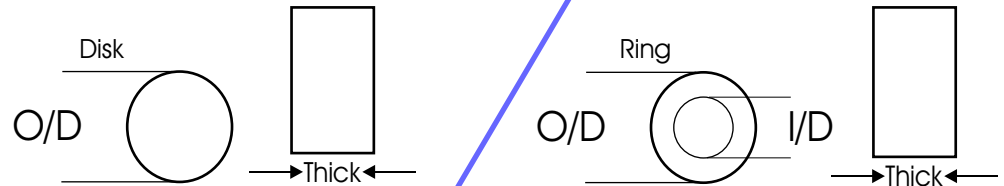

BONDED NEODYMIUM MAGNETIC DISKS

EAM Part No.	Outer Diameter	Thickness	Lift Strength	MGOe	Grade	Max Operating Temp. (C)	Finish	Machineable?	Impact Resistance
CB-0536	0.08"	0.197"	0.3	10	10	110°	Black Epoxy	Yes	Good
CB-0537	0.188"	0.138"	0.3	10	10	110°	Black Epoxy	Yes	Good
CB-0538	0.197"	0.08"	0.3	10	10	110°	Black Epoxy	Yes	Good
CB-0539	0.236"	0.08"	0.3	10	10	110°	Black Epoxy	Yes	Good
CB-0540	0.08"	0.394"	0.6	10	10	110°	Black Epoxy	Yes	Good
CB-0541	0.118"	0.275"	0.6	10	10	110°	Black Epoxy	Yes	Good
CB-0542	0.197"	0.157"	0.6	10	10	110°	Black Epoxy	Yes	Good
CB-0543	0.236"	0.157"	0.7	10	10	110°	Black Epoxy	Yes	Good
CB-0544	0.335"	0.118"	0.7	10	10	110°	Black Epoxy	Yes	Good
CB-0545	0.157"	0.275"	0.8	10	10	110°	Black Epoxy	Yes	Good

BONDED NEODYMIUM MAGNETIC RINGS

EAM Part No.	Outer Dia.	Inner Dia.	Thickness	Lift Strength	MGOe	Grade	Max Operating Temp. (C)	Finish	Machineable?	Impact Resistance
CB-0546	1.023"	0.197"	0.866"	0.6	10	10	110°	Black Epoxy	Yes	Good
CB-0547	1.023"	0.394"	0.866"	1.1	10	10	110°	Black Epoxy	Yes	Good
CB-0548	1.181"	0.197"	0.63"	2	10	10	110°	Black Epoxy	Yes	Good
CB-0549	1.378"	0.197"	0.827"	2	10	10	110°	Black Epoxy	Yes	Good
CB-0550	1.181"	0.394"	0.63"	4	10	10	110°	Black Epoxy	Yes	Good

700 Hicksville Road • ENECON Center Suite 110 • Bethpage, New York 11714
Toll Free: 877-ENEFLUX • Phone: 516.576.3434 • Fax: 516.349.5522
Website: www.eamagnetics.com • Email: info@eamagnetics.com